




HUNTER PANELS H-SHIELD

Flat Polyisocyanurate Insulation

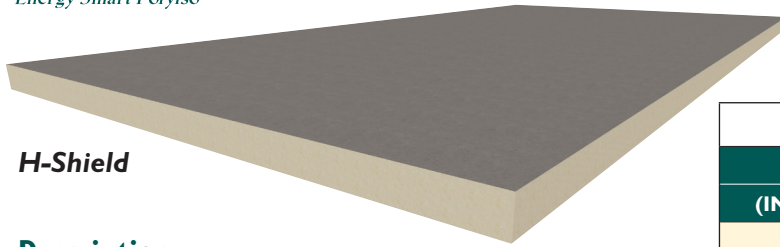

H-Shield

Description

H-Shield is a rigid roof insulation panel composed of a closed cell polyisocyanurate foam core manufactured on-line to fiber reinforced facers on each side (GRF).

Premium Performance Attributes

- Manufactured with NexGen Chemistry: Contains no CFCs, HFCs, HCFCs, is Zero ODP, EPA Compliant, and has virtually no GWP
- Manufactured with NexGen Chemistry: Contains no CFCs, HCFCs, HFCs, is Zero ODP, EPA Compliant, and has virtually no GWP
- Approved for direct application to steel decks
- Approved under all major roof covering systems – BUR, Modified and Single-Ply



Applications

- Constructions requiring FM Class 1 and UL Class A ratings
- Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)
- Standing Seam Metal Roof Systems
- Modified Bitumen Systems
- Built-Up Roofing: Asphalt and Coal Tar

Panel Characteristics

- Available in two grades of compressive strengths per ASTM C1289 Type II, Class 1 Grade 2 (20 psi) or Grade 3 (25 psi)
- Available in 4'x4' (1220mm x 1220mm) and 4'x8' (1220mm x 2440mm) panels in thicknesses of 1" (25mm) to 4.5" (114mm)
- Also available as special cut products - straight cut and flute fill. For more information please see Hunter Panels product data sheets for these products.

Potential LEED Credits for Polyiso Use

Energy and Atmosphere

- Optimize Energy Performance

Materials & Resources

- Building Life-Cycle Impact Reduction
- Environment Product Declaration
- Material Reuse
- Recycled Content
- Construction and Demolition Waste Management

Indoor Environmental Quality

- Thermal Comfort

H-SHIELD THERMAL VALUES

THICKNESS		LTTR R VALUE*	FLUTE SPANABILITY
(INCHES)	(MM)		
1.00	25	5.7	2 5/8"
1.50	38	8.6	4 3/8"
1.80	46	10.3	4 3/8"
2.00	51	11.4	4 3/8"
2.50	64	14.4	4 3/8"
2.60	66	15.0	4 3/8"
3.00	76	17.4	4 3/8"
3.50	89	20.5	4 3/8"
3.80	97	22.3	4 3/8"
4.00	102	23.6	4 3/8"
4.30	109	25.5	4 3/8"
4.50	114	26.8	4 3/8"

*Long Term Thermal Resistance Values are based on ASTM C 1289.

Codes and Compliances

- ASTM C 1289 Type II, Class 1 Grade 2 (20 psi) or Grade 3 (25 psi)
- International Building Code (IBC) Chapter 26
- State of Florida Product Approval Number FL 5968
- California Code of Regulations, Title 24, Insulation Quality Standard License #TI-1420
- Miami Dade County Product Control Approved

Underwriters Laboratories Inc Classifications

- UL 1256
- Insulated Steel Deck Construction Assemblies – No. 120, 123, 292
- UL 790
- UL 263 Hourly Rated P Series Roof Assemblies

UL Classified for use in Canada

- Refer to UL Directory of Products Certified for Canada for more details
- CCMC 13460-L
- UL Certified for Canada, CAN/ULC-S126, CAN/ULC-S101, CAN/ULC-S107
- CAN/ULC-S704 Type 2, Class 3 (20 psi) or Type 3, Class 3 (25 psi)


Factory Mutual Approvals

- FM 4450, FM 4470
- Approved for Class 1 insulated steel deck constructions for 1-60 to 1-270. Refer to FM Approval's RoofNav for details on specific systems



HUNTER PANELS H-SHIELD

Flat Polyisocyanurate Insulation

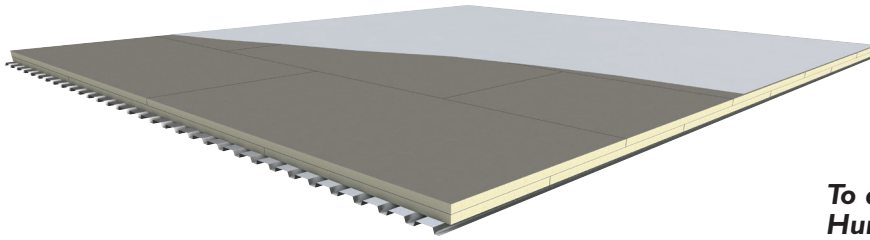

R-30.0, two layers of 2.6" H-Shield with Single-Ply membrane

To achieve optimal thermal performance, Hunter Panels recommends installation of a multi-layer system with staggered joints.

H-SHIELD TYPICAL PHYSICAL PROPERTY DATA CHART POLYISO FOAM CORE ONLY

PROPERTY	TEST METHOD	VALUE
Compressive Strength	ASTM D 1621	20 psi* (138kPa, Grade 2)
Dimensional Stability	ASTM D 2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E 96	< 1 perm (57.5ng/(Pa•s•m ²))
Water Absorption	ASTM C 209	< 1% volume
Flame Spread**	ASTM E 84	< 75
Smoke Developed**	ASTM E 84	< 450
Service Temperature	-	-100° to 250° F (-73°C to 122°C)

*Also available in 25 psi, Grade 3
**Meets the requirements of the IBC code. For specific Flame Spread or Smoke Developed Ratings please contact the Hunter Panels Technical Department

INSTALLATION

Single-Ply Systems

Ballasted Single-Ply Systems

Each H-Shield panel is loosely laid on the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

Mechanically Attached Single-Ply Systems

Each H-Shield panel must be secured to the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

Fully Adhered Single-Ply

Each H-Shield panel must be secured to the roof deck. Maximum 4'x4' (1220mm x 1220mm) panels of H-Shield may be adhered to a prepared concrete deck or subsequent layers of insulation with a full mopping of hot steep asphalt, insulation adhesive or cold applied mastic. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

WARNINGS AND LIMITATIONS

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof covering material. Hunter Panels will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. For more information refer to the Storage and Handling Technical Bulletin at www.hunterpanels.com, or refer to PIMA Technical Bulletin No. 109: *Storage & Handling Recommendations for Polyiso Roof Insulation* at www.polyiso.org.

Built Up, Coal Tar And Modified Bitumen Systems (APP, SBS)

Each H-Shield panel must be secured to the roof deck. Maximum 4'x4' (1220mm x 1220mm) panels of H-Shield may be adhered to a prepared concrete deck or subsequent layers of insulation with a full mopping of hot steep asphalt, insulation adhesive or cold applied mastic. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.



Hunter Panels | Energy Smart Polyiso | 888.746.1114 | www.hunterpanels.com

New York Illinois Florida Texas Utah Pennsylvania Washington

