




HUNTER PANELS TAPERED H-SHIELD CG

Sloped Premium Performance Faced
Polyisocyanurate Insulation

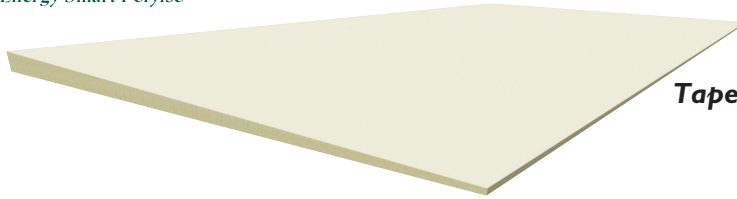

Tapered H-Shield CG

Product Description

Tapered H-Shield CG is a rigid roof insulation panel composed of a closed cell polyisocyanurate foam core manufactured on-line to a premium performance coated glass facer on both sides (CGF). For best results, request assistance from Hunter Panels Tapered Design Team.


Premium Performance Attributes

- Manufactured with NexGen Chemistry: Contains no CFCs, HFCs, HCFCs, is Zero ODP, EPA Compliant, and has virtually no GWP
- Provides improved dimensional stability, fire performance and resistance to mold growth. Passed (10) Resistance to Mold test ASTM D 3273
- Achieves a Class A combustible deck assembly rating without the use of a fire rated slip sheet or the presence of a gypsum cover board when applied at a thickness of 3" or greater in a single layer or in combination of multiple layers (ie: two layers of 1.5")



Panel Characteristics

- Available in two grades of compressive strengths per ASTM C 1289 Type II, Class 2 Grade 2 (20 psi) or Grade 3 (25 psi)
- Available slopes are 1/16" (2mm), 1/8" (3mm), 3/16" (5mm), 1/4" (6mm), 3/8" (10mm) and 1/2" (13mm) per foot
- Available in 4'x4' (1220mm x 1220mm) and 4'x8' (1220mm x 2440mm) panels in thicknesses of 0.5" (13mm) to 4.5" (114mm) maximum in a single layer
- Available as Pre-Cut and Pre-Assembled hips, valleys and sumps. See the Hunter Panels Tapered Pre-Cut Brochure for more information

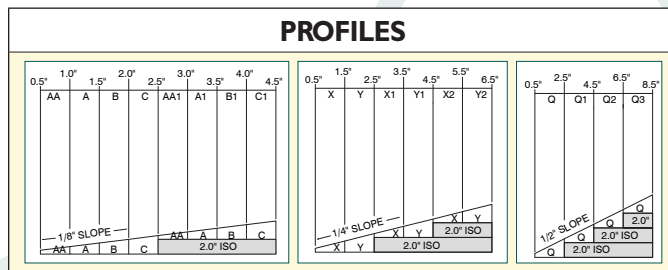

Applications

- Constructions requiring FM Class 1 and UL Class A ratings
- Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)
- Modified Bitumen Systems
- Built-Up Roofing: Asphalt and Coal Tar

Codes and Compliances

- ASTM C 1289 Type II, Class 2 Grade 2 (20 psi) or Grade 3 (25 psi)
- International Building Code (IBC) Chapter 26
- State of Florida Product Approval Number FL 5968
- Miami Dade County Product Control Approved
- California Code of Regulations, Title 24, Insulation Quality Standard License #TI-1420

Underwriters Laboratories Inc Classifications

- UL 1256
- Insulated Steel Deck Construction Assemblies – No. 120, 123, 292
- UL 790
- UL 263 Hourly Rated P Series Roof Assemblies

UL Classified for use in Canada

- Refer to UL Directory of Products Certified for Canada for more details
- CAN/ULC-S704 Type 2, Class 3 (20 psi) or Type 3, Class 3 (25 psi)
- CCMC 13460-L
- UL Certified for Canada, CAN/ULC-S126, CAN/ULC-S101, CAN/ULC-S107

Factory Mutual Approvals

- FM 4450, FM 4470
- Approved for Class 1 insulated steel deck constructions for 1-60 to 1-270. Refer to FM Approval's RoofNav for details on specific systems

Potential LEED Credits for Polyiso Use

Energy and Atmosphere

- Optimize Energy Performance

Materials & Resources

- Building Life-Cycle Impact Reduction
- Environment Product Declaration
- Material Reuse
- Recycled Content
- Construction and Demolition Waste Management


Indoor Environmental Quality

- Thermal Comfort



HUNTER PANELS TAPERED H-SHIELD CG

Sloped Premium Performance Faced
Polyisocyanurate Insulation

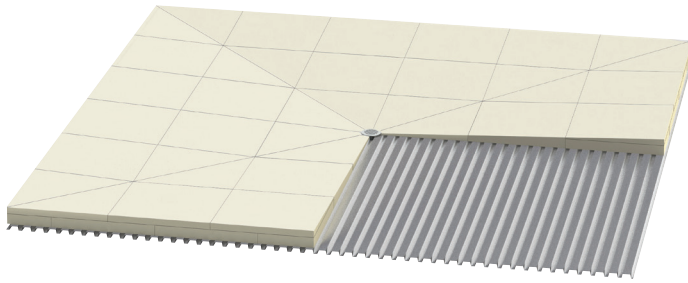

Tapered H-Shield CG on Steel Deck



Tapered H-Shield CG on Wood Deck

TAPERED H-SHIELD CG TYPICAL PHYSICAL PROPERTY DATA CHART POLYISO FOAM CORE ONLY

PROPERTY	TEST METHOD	VALUE
Compressive Strength	ASTM D 1621	20 psi* (138kPa, Grade 2)
Dimensional Stability	ASTM D 2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E 96	< 1 perm (57.5ng/(Pa•s•m ²))
Water Absorption	ASTM C 209	< 1% volume
Flame Spread**	ASTM E 84	< 75
Smoke Developed**	ASTM E 84	< 450
Service Temperature	-	-100° to 250° F (-73°C to 122°C)

*Also available in 25 psi, Grade 3
**Meets the requirements of the IBC code. For specific Flame Spread or Smoke Developed Ratings please contact the Hunter Panels Technical Department

WARNINGS AND LIMITATIONS

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof covering material. Hunter Panels will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. For more information refer to the Storage and Handling Technical Bulletin at www.hunterpanels.com, or refer to PIMA Technical Bulletin No. 109: *Storage & Handling Recommendations for Polyiso Roof Insulation* at www.polyiso.org.

INSTALLATION

Single-Ply Systems

Ballasted Single-Ply

Tapered H-Shield CG panels are loosely laid on the roof deck. Butt the edges of the insulation panels and stagger the joints. Install the roof covering according to the manufacturer's specifications.

Mechanically Attached Single-Ply Systems

Tapered H-Shield CG must be secured to the roof deck. Butt the edges of the insulation panels and stagger the joints. Install the roof covering according to the manufacturer's specification.

Fully Adhered Single-Ply

Each Tapered H-Shield CG panel must be secured to the roof deck. Maximum 4'x4' (1220mm x 1220mm) panels of Tapered H-Shield CG may be adhered to a prepared concrete deck or subsequent layers of insulation with a full mopping of hot steep asphalt, insulation adhesive or cold applied mastic. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

Built Up, Coal Tar And Modified Bitumen Systems (APP, SBS)

Each Tapered H-Shield CG panel must be secured to the roof deck. Maximum 4'x4' (1220mm x 1220mm) panels of Tapered H-Shield CG may be adhered to a prepared concrete deck or subsequent layers of insulation with a full mopping of hot steep asphalt, insulation adhesive or cold applied mastic. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.



Hunter Panels | Energy Smart Polyiso | 888.746.1114 | www.hunterpanels.com

New York Illinois Florida Texas Utah Pennsylvania Washington

