




HUNTER
CONTINUOUS INSULATION

ECHOTape MT-A7757

All Weather Aluminum Foil Tape

HUNTER Xci INSULATION

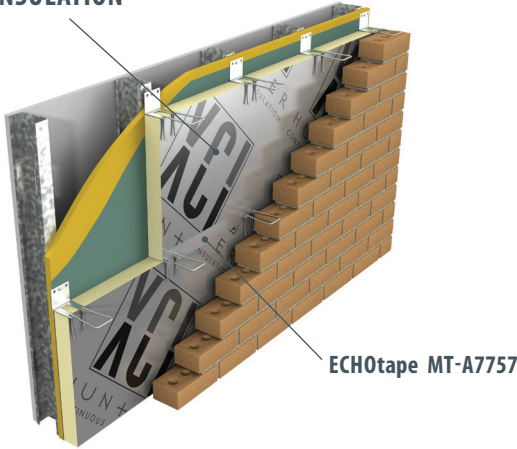

Technical Data

Property	Value
Carrier	1.6 mil Aluminum Foil
Adhesive	Acrylic
Release Liner	Siliconized Paper
Total Thickness	3.35 mils
Tensile	10.2 lbs/in
Adhesion	≥70 oz/in
Application Temperature	-4°F to 104°F (-20°C to 48°C)
Service Temperature	-37°F to 248°F (-35°C to 120°C)
Color	Silver

Manufacturer

ECHOTape
5645 Daniels Street
Chino, CA 91710
P 800-461-8273
info@echotape.com
www.echotape.com

Description

MT-A7757 is a high strength multi-purpose aluminum foil tape that can be used to seal joints and seams of Hunter Xci continuous insulation products, such as Xci Foil and Xci Foil (Class A). It is coated with a superior performance flame retardant cold weather acrylic adhesive, and conforms well to surfaces providing a strong bond. This adhesive tape offers good reliability across both high and low temperature ranges. The paper release liner protects the adhesive from contaminants when the tape needs to be cut to specific lengths for use in tight spaces ensuring a strong bond once applied.

Features and Benefits

- An initial quick stick helps speed up application
- Low MVTR (Moisture Vapor Transmission Rate)
- Mold resistant
- Easy to remove paper liner

Storage and Usage Conditions

Store tape in its original packaging away from direct sunlight and in a cool and dry area. For optimum performance, tape should be used within 12 months of date of shipment. Tape works best when applied to a surface that is clean, dry and free of grease, oil or other contaminants.

Sizes

Nominal 2" (1.89") x 50 yd | 48 mm x 45,72 m
Nominal 3" (2.83") x 50 yd | 72 mm x 45,72 m
Nominal 4" (3.78") x 50 yd | 96 mm x 45,72 m

Warnings and Limitations

The information cited is in good faith and has been established from sources held to be secure and reliable. The values listed are typical properties. Individual rolls may vary slightly from these values. All ECHOTape products are warranted to be free of defects at time of shipment. Many factors can affect the use and performance of a product in a particular application and the user must, by test or otherwise, determine suitability for purpose; Edelstein makes no representation or warranty, express or implied, concerning any application and usage if its products. If ECHOTape product is proved to be defective, the exclusive remedy, shall be for Edelstein to replace the defective product. ECHOTape shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including but not limited to, contract, negligence, warranty or strict liability.