




HUNTER
CONTINUOUS INSULATION

Hunter Xci 286 White Foil Tape

All Weather White Aluminum Foil Tape

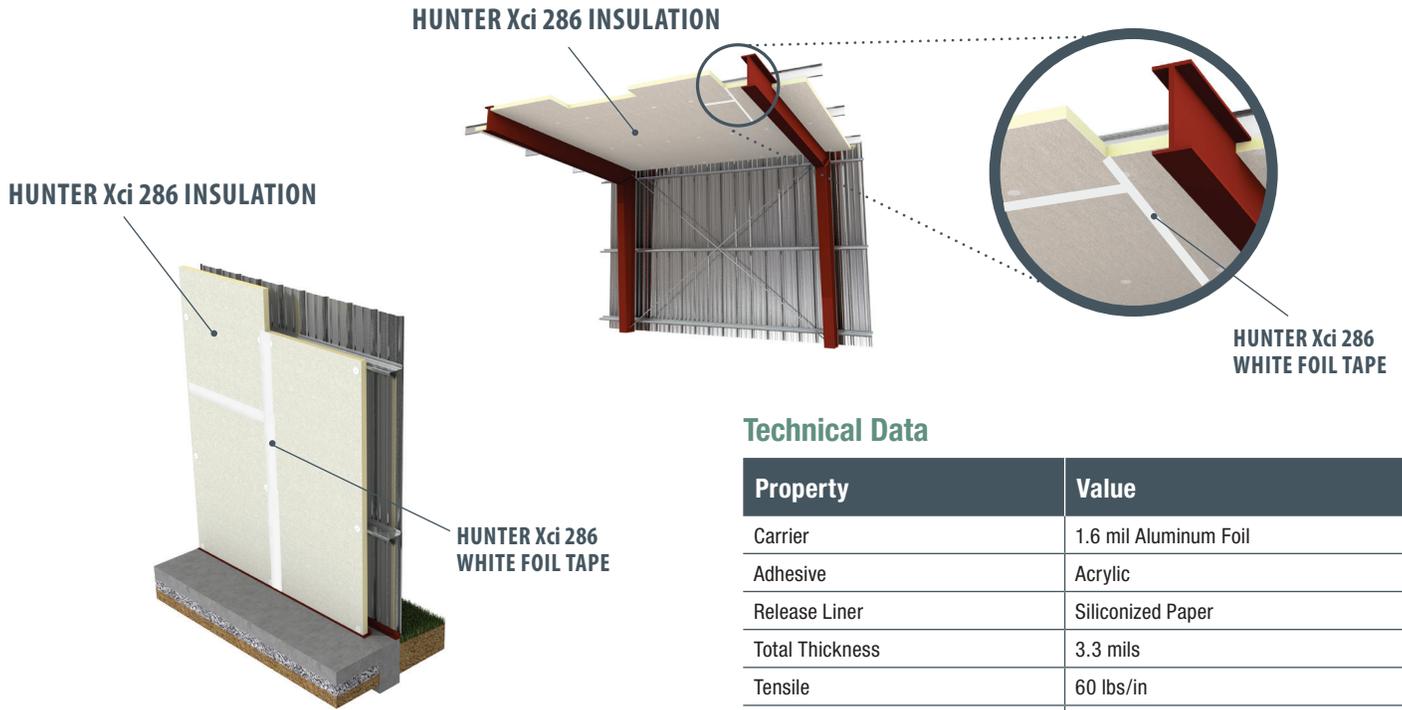

Technical Data

Property	Value
Carrier	1.6 mil Aluminum Foil
Adhesive	Acrylic
Release Liner	Siliconized Paper
Total Thickness	3.3 mils
Tensile	60 lbs/in
Adhesion	72 oz/in
Application Temperature	-4°F to 104°F (-20°C to 48°C)
Service Temperature	-31°F to 248°F (-35°C to 120°C)
Color	White

Description

Hunter Xci 286 White Foil Tape is a high strength tape specially designed for sealing lap joints on rigid foam sheathing materials. Hunter Xci 286 White Foil Tape is composed of thermoplastic and aluminum to ensure strong performance when used to seal joints for foam core insulation boards. It is coated with a superior performance flame retardant cold weather acrylic adhesive, and conforms well to surfaces providing a strong bond. This adhesive tape offers good reliability across both high and low temperature ranges. The paper release liner protects the adhesive from contaminants when the tape needs to be cut to specific lengths for use in tight spaces ensuring a strong bond once applied.

Features and Benefits

- An initial quick stick helps speed up application
- Low MVTR (Moisture Vapor Transmission Rate)
- Mold resistant
- Easy to remove paper liner
- Effectively seals seams/joints in Hunter Xci 286 applications while providing a clean, consistent look

Storage and Usage Conditions

Store tape in its original packaging away from direct sunlight and in a cool and dry area. For optimum performance, tape should be used within 12 months of date of shipment. Tape works best when applied to a surface that is clean, dry and free of grease, oil or other contaminants.

Sizing

Nominal 2.95" x 50 yd | 75mm x 45,72m

Warnings and Limitations

The information cited is in good faith and has been established from sources held to be secure and reliable. The values listed are typical properties. Individual rolls may vary slightly from these values. All Hunter Panels products are warranted to be free of defects at time of shipment. Many factors can affect the use and performance of a product in a particular application and the user must, by test or otherwise, determine suitability for purpose; Hunter Panels makes no representation or warranty, express or implied, concerning any application and usage of its products. If Hunter Panels product is proved to be defective, the exclusive remedy, shall be for Hunter Panels to replace the defective product. Hunter Panels shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including but not limited to, contract, negligence, warranty or strict liability.