




Fastening Information for Steel Stud Walls

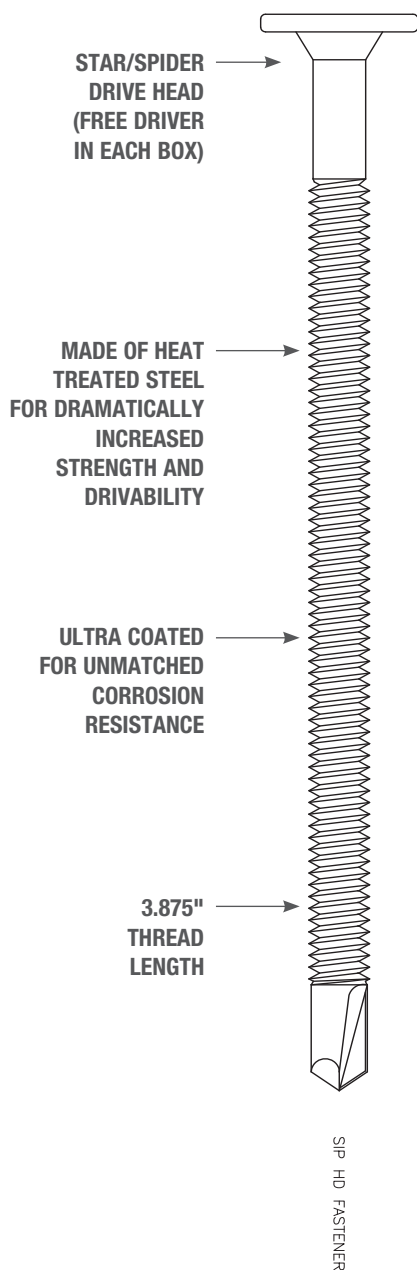

Hunter Panels SIP HD Fastener is intended to mechanically attach Hunter Xci NB, Hunter Xci Ply or Hunter Xci Ply (Class A) to steel studs or steel framing. Hunter Panels SIP HD Fastener has the following features:

- FM approved — plates not required
- star/spider head eliminates need for washer and offers dramatically increased pull-out value
- 100% American made
- fast, one-step installation
- no pre-drilling
- multiple bits included in each pail
- SIP/HD is for 16 ga or thicker steel studs

Test Description	Typical Value
Pull-through (lbs)	630
Pull-out (lbs):	
Structural Steel 18 ga	1690 lbf
3/16"	3100 lbf
1/4"	4500 lbf

Physical Data Chart	
Head Diameter	.625"
Thread Diameter	.245"
Shank Diameter	.212"
Fastener Length*	4.5", 6"

Minimum 1" penetration into steel stud.

*Consult NTA Report for recommended fastener spacing.

For more information on these products, visit www.hunterpanels.com.

Hunter Panels | 15 Franklin St, Portland, Maine 04101 | 888.746.1114 | www.hunterpanels.com

NEW YORK ILLINOIS FLORIDA TEXAS UTAH PENNSYLVANIA WASHINGTON



HUNTER
CONTINUOUS INSULATION