


## Fastening Information for Xci Ply, Xci Py (Class A), and Xci NB in Wood Stud Walls

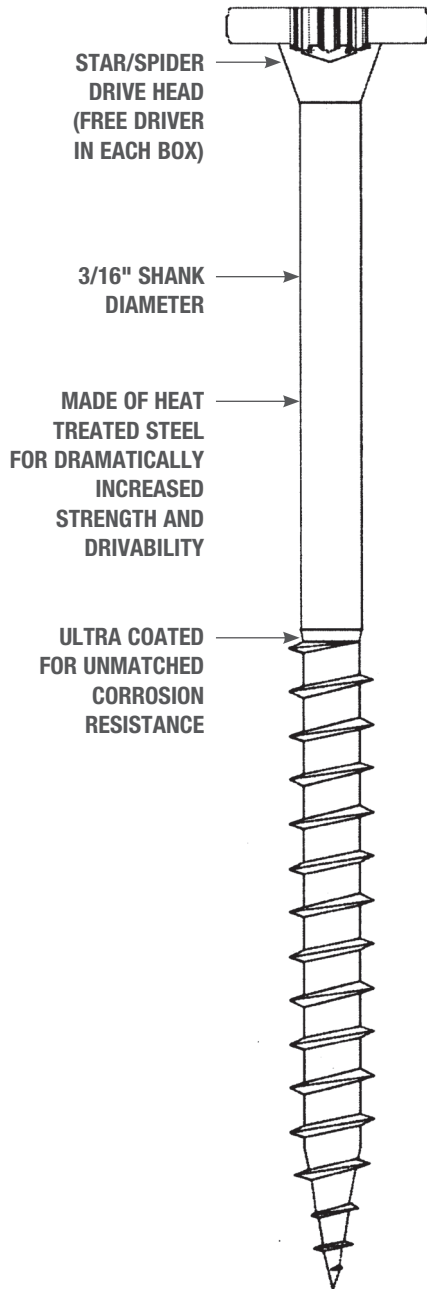

Hunter Panels **SIP/WD** Fastener is intended to mechanically attach Hunter Xci NB, Hunter Xci Ply or Xci Ply (Class A) to wood studs or wood framing. Hunter Panels SIP/WD Fastener has the following features:

- FM approved—plates not required
- Star/spider head eliminates need for washer and offers dramatically increased pull-out value
- 100% American made
- Fast, one-step installation
- No pre-drilling
- Multiple bits included in each pail

Test Description	Typical Value
<b>Pull-through (lbs):</b>	
7/16" OSB	630
<b>Pull-out (lbs):</b>	
1/2" plywood	442
5/8" plywood	459
3/4" plywood	710
Douglas Fir (1" pen.)	768

Fasteners should never be struck with a hammer during installation.

### Physical Data Chart

Head Diameter	.625"
Thread Diameter	0.240"
Shank Diameter	0.190"
Fastener Length*	3", 3½", 4", 4½", 5", 5½", 6", 6½"

\* Consult NTA Report for recommended fastener spacing.

- **Minimum 1.5" penetration into wood stud.**

For more information on these products, visit [www.hunterpanels.com](http://www.hunterpanels.com).

Hunter Panels | 15 Franklin St, Portland, Maine 04101 | 888.746.1114 | [www.hunterpanels.com](http://www.hunterpanels.com)

NEW YORK ILLINOIS FLORIDA TEXAS UTAH PENNSYLVANIA WASHINGTON