



Hunter Panels Flat Polyiso Roofing Products

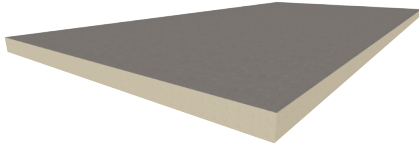

H-SHIELD Flat Insulation

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A and FM Class 1
- Highest Recycled Content
- Most Economical Polyiso Product
- **Applications:** Standing Seam Metal, BUR, Modified Bitumen, Cold Applied
- Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered

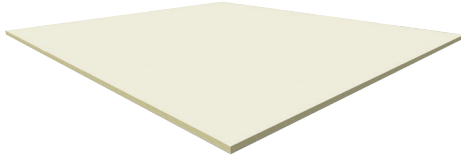

H-SHIELD CG Premium Performance Faced Insulation

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A and FM Class 1
- Mold resistant facer, 9% pre-consumer recycled content
- SH1 Hail Rating
- Increased moisture resistance and dimensionally stability
- **Applications:** Standing Seam Metal, BUR, Modified Bitumen, Cold Applied
- Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam




H-SHIELD PREMIER Manufactured On-Line to Heavy Duty Coated Glass Facers

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A combustible deck assembly rating at a 1" thickness without the use of a fire-rated slip sheet or gypsum cover board
- SH1 Hail Rating
- **Applications:** Any construction requiring Class A Ratings, BUR, Modified Bitumen, Cold Applied
- Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam



H-SHIELD HD 1/2" High-Density Cover Board

- Available in 4'x4' and 4'x8' with 109 PSI max
- UL Class A and FM Class 1
- Mold resistant facer, 9% pre-consumer recycled content
- SH1 Hail Rating
- Lightweight cover board product (only 11 lbs per board)
- New Construction and Retrofit
- **Applications:** BUR, Modified Bitumen, Cold Applied,
- Single-Ply Systems: Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam

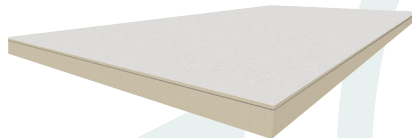


H-SHIELD HD COMPOSITE CG 1/2" H-Shield HD Manufactured On-Line to Premium Performance Polyiso

- Available in 4'x4' and 4'x8'
- UL Class A and FM Class 1
- Mold resistant facer, 9% pre-consumer recycled content
- SH1 Hail Rating
- New Construction and Retrofit
- **Applications:** BUR, Modified Bitumen, Cold Applied,
- Single-Ply Systems: Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam



H-SHIELD NB Manufactured On-Line to Oriented Strand Board or Plywood

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A and FM Class 1
- Not a structural panel
- 1.5" to 4.0" thicknesses, R-values from 6.3 - 21.1
- **Applications:** Low slope, heavyweight shingles and Standing Seam Metal Roof Systems

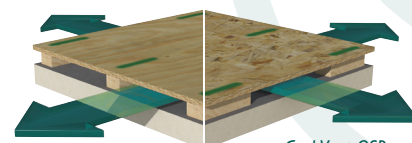

COOL-VENT Ventilated Nailbase Polyiso Panel

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A and FM Class 1
- Bottom layer polyiso, middle wood block spacers, top layer OSB or plywood
- 2.5" to 5" thickness, R-values from 5.7 - 20.5
- **Applications:** Non-insulated cathedral and vaulted ceilings, steep slope 3:12 and greater

Cool-Vent Plywood

Cool-Vent OSB



HUNTER
Energy Smart Polyiso

15 FRANKLIN STREET, PORTLAND, MAINE 04101
TF 888.746.1114 F 877.775.1769 · HUNTERPANELS.COM