




HUNTER

XCI PLY, XCI CLASS A, AND XCI NB IN WOOD STUD WALLS

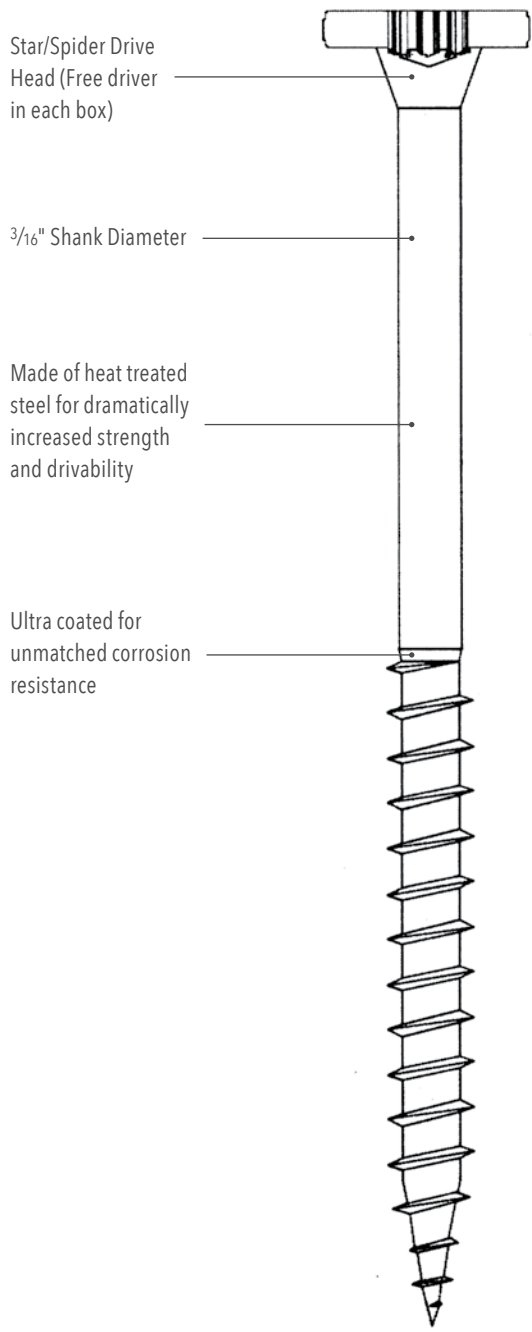

Hunter Xci SIP/WD Fastener is intended to mechanically attached Hunter Xci NB, Xci Ply and Xci Ply Class A to wood studs or wood framing. They can also be used for concrete and CMU applications with pre-drilling. Hunter Xci SIP/WD Fastener has the following features:

- FM approved – plates not required
- Star/spider head eliminates need for washer and offers increased pull-out value
- Fast, one-step installation
- No pre-drilling
- Multiple bits included in each pail

Description	Value
Pull-through (lbs):	
7/16" OSB	630
Pull-out (lbs):	
1/2" plywood	442
5/8" plywood	459
3/4" plywood	710
Douglas Fir (1" pen.)	768
Head Diameter	.625"
Thread Diameter	0.255"
Shank Diameter	0.190"
Fastener Length*	3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2"

Values per FM 4470
 * Consult DrJ TER 2102-05 for recommended fastener spacing.

Minimum penetration is 1.5" - 2.0" depending on substrate.



CONTINUOUS INSULATION