



# PACKAGING AND WEIGHT

FULL LISTING

## H-SHIELD

SIZE	LTR	PCS/PL	LBS/4x12 PC	LBS/4x8 PC	LBS/4x4 PC	LBS/4x12 PL	LBS/4x8 PL	LBS/4x4 PL	4x12 SF/PL	4x8 SF/PL	4x4 SF/PL	SF/48' TRL	WEIGHT PER SF
0.5	2.8	96	7.63	5.09	2.54	732.67	488.45	244.224	-	3072	1536	73728	0.16
1.0	5.7	48	11.23	7.49	3.74	539.14	359.42	179.712	-	1536	768	36864	0.23
1.1	6.3	43	11.95	7.97	3.98	513.94	342.62	171.312	-	1376	688	33024	0.25
1.2	6.8	40	12.67	8.45	4.22	506.88	337.92	168.96	-	1280	640	30720	0.26
1.3	7.4	36	13.39	8.93	4.46	482.11	321.41	160.704	-	1152	576	27648	0.28
1.4	8	34	14.11	9.41	4.7	479.81	319.87	159.936	-	1088	544	26112	0.29
1.5	8.6	32	14.83	9.89	4.94	474.62	316.42	158.208	1536	1024	512	24576	0.31
1.6	9.1	30	15.55	10.37	5.18	466.56	311.04	155.52	1440	960	480	23040	0.32
1.7	9.7	28	16.27	10.85	5.42	455.62	303.74	151.872	1344	896	448	21504	0.34
1.75	10	27	16.63	11.09	5.54	449.06	299.38	149.688	1296	864	432	20736	0.35
1.8	10.3	26	16.99	11.33	5.66	441.79	294.53	147.264	1248	832	416	19968	0.35
1.9	10.8	25	17.71	11.81	5.9	442.8	295.2	147.6	1200	800	400	19200	0.37
2.0	11.4	24	18.43	12.29	6.14	442.37	294.91	147.456	1152	768	384	18432	0.38
2.1	12	22	19.15	12.77	6.38	421.34	280.9	140.448	1056	704	352	16896	0.4
2.2	12.6	21	19.87	13.25	6.62	417.31	278.21	139.104	1008	672	336	16128	0.41
2.3	13.2	20	20.59	13.73	6.86	411.84	274.56	137.28	960	640	320	15360	0.43
2.4	13.8	20	21.31	14.21	7.1	426.24	284.16	142.08	960	640	320	15360	0.44
2.5	14.4	19	22.03	14.69	7.34	418.61	279.07	139.536	912	608	304	14592	0.46
2.6	15	18	22.75	15.17	7.58	409.54	273.02	136.512	864	576	288	13824	0.47
2.7	15.6	17	23.47	15.65	7.82	399.02	266.02	133.008	816	544	272	13056	0.49
2.8	16.2	17	24.19	16.13	8.06	411.26	274.18	137.088	816	544	272	13056	0.5
2.9	16.8	16	24.91	16.61	8.3	398.59	265.73	132.864	768	512	256	12288	0.52
3.0	17.4	16	25.63	17.09	8.54	410.11	273.41	136.704	768	512	256	12288	0.53
3.1	18	15	26.35	17.57	8.78	395.28	263.52	131.76	720	480	240	11520	0.55
3.2	18.6	15	27.07	18.05	9.02	406.08	270.72	135.36	720	480	240	11520	0.56
3.3	19.2	14	27.79	18.53	9.26	389.09	259.39	129.696	672	448	224	10752	0.58
3.4	19.9	14	28.51	19.01	9.5	399.17	266.11	133.056	672	448	224	10752	0.59
3.5	20.5	13	29.23	19.49	9.74	380.02	253.34	126.672	624	416	208	9984	0.61
3.6	21.1	13	29.95	19.97	9.98	389.38	259.58	129.792	-	416	208	9984	0.62
3.7	21.7	12	30.67	20.45	10.22	368.06	245.38	122.688	-	384	192	9216	0.64
3.8	22.3	12	31.39	20.93	10.46	376.7	251.14	125.568	-	384	192	9216	0.65
3.9	23	12	32.11	21.41	10.7	385.34	256.9	128.448	-	384	192	9216	0.67
4.0	23.6	12	32.83	21.89	10.94	393.98	262.66	131.328	-	384	192	9216	0.68
4.1	24.2	12	33.55	22.37	11.18	402.62	268.42	134.208	-	384	192	9216	0.7
4.2	24.9	12	34.27	22.85	11.42	411.26	274.18	137.088	-	384	192	9216	0.71
4.3	25.5	11	34.99	23.33	11.66	384.91	256.61	128.304	-	352	176	8448	0.73
4.4	26.1	10	35.71	23.81	11.9	357.12	238.08	119.04	-	320	160	7680	0.74
4.5	26.8	10	36.43	24.29	12.14	364.32	242.88	121.44	-	320	160	7680	0.76

# H-SHIELD CG

SIZE	LTR	PCS/PL	LBS/4x8 PC	LBS/4x4 PC	LBS/4x8 PL	LBS/4x4 PL	4x8 SF/PL	4x4 SF/PL	SF/48' TRL	WEIGHT PER SF
0.5	2.4	96	8.8	4.4	844.8	422.4	3072	1536	73728	0.28
1.0	5.7	48	11.2	5.6	537.6	268.8	1536	768	36864	0.35
1.1	6.3	43	11.68	5.84	502.24	251.12	1376	688	33024	0.37
1.2	6.8	40	12.16	6.08	486.4	243.2	1280	640	30720	0.38
1.3	7.4	36	12.64	6.32	455.04	227.52	1152	576	27648	0.4
1.4	8	34	13.12	6.56	446.08	223.04	1088	544	26112	0.41
1.5	8.6	32	13.6	6.8	435.2	217.6	1024	512	24576	0.43
1.6	9.1	20	14.08	7.04	281.6	140.8	960	480	23040	0.44
1.7	9.7	28	14.56	7.28	407.68	203.84	896	448	21504	0.46
1.75	10	27	14.8	7.4	399.6	199.8	864	432	20736	0.46
1.8	10.3	26	15.04	7.52	391.04	195.52	832	416	19968	0.47
1.9	10.8	25	15.52	7.76	388	194	800	400	19200	0.49
2.0	11.4	24	16	8	384	192	768	384	18432	0.5
2.1	12	22	16.48	8.24	362.56	181.28	704	352	16896	0.52
2.2	12.6	21	16.96	8.48	356.16	178.08	672	336	16128	0.53
2.3	13.2	20	17.44	8.72	348.8	174.4	640	320	15360	0.55
2.4	13.8	20	17.92	8.96	358.4	179.2	640	320	15360	0.56
2.5	14.4	19	18.4	9.2	349.6	174.8	608	304	14592	0.58
2.6	15	18	18.88	9.44	339.84	169.92	576	288	13824	0.59
2.7	15.6	17	19.36	9.68	329.12	164.56	544	272	13056	0.61
2.8	16.2	17	19.84	9.92	337.28	168.64	544	272	13056	0.62
2.9	16.8	16	20.32	10.16	325.12	162.56	512	256	12288	0.64
3.0	17.4	16	20.8	10.4	332.8	166.4	512	256	12288	0.65
3.1	18	15	21.28	10.64	319.2	159.6	480	240	11520	0.67
3.2	18.6	15	21.76	10.88	326.4	163.2	480	240	11520	0.68
3.3	19.2	14	22.24	11.12	311.36	155.68	448	224	10752	0.7
3.4	19.9	14	22.72	11.36	318.08	159.04	448	224	10752	0.71
3.5	20.5	13	23.2	11.6	301.6	150.8	416	208	9984	0.73
3.6	21.1	13	23.68	11.84	307.84	153.92	416	208	9984	0.74
3.7	21.7	12	24.16	12.08	289.92	144.96	384	192	9216	0.76
3.8	22.3	12	24.64	12.32	295.68	147.84	384	192	9216	0.77
3.9	23	12	25.12	12.56	301.44	150.72	384	192	9216	0.79
4.0	23.6	12	25.6	12.8	307.2	153.6	384	192	9216	0.8
4.1	24.2	12	26.08	13.04	312.96	156.48	352	176	8448	0.82
4.2	24.9	12	26.56	13.28	318.72	159.36	352	176	8448	0.83
4.3	25.5	11	27.04	13.52	297.44	148.72	352	176	8448	0.85
4.4	26.1	10	27.52	13.76	275.2	137.6	320	160	7680	0.86
4.5	26.8	10	28	14	280	140	320	160	7680	0.88

## H-SHIELD HD-MA

PRODUCT THICKNESS	FOAM WEIGHT	FACER WEIGHT	LBS/PC (4x8)	LBS/SF	LBS/PC (4x4)	LBS/PL (4x8)	LBS/PL (4x4)
0.5	6	2.69	8.69	0.2715	4.344	390.96	195.48

## H-SHIELD HD

PRODUCT THICKNESS	FOAM WEIGHT	FACER WEIGHT	LBS/PC (4x8)	LBS/SF	LBS/PC (4x4)	LBS/PL (4x8)	LBS/PL (4x4)
0.5	6	6.4	12.4	0.3875	6.2	558	279

## H-SHIELD HD COMPOSITE CG - 4X8 PANELS

SIZE	LTR	PCS	LBS/PC	LBS/PAL	LBS/SF
2.0	11.1	24	21.89	525.36	0.684
2.5	13.9	19	24.48	465.12	0.765
3.0	16.9	16	27.07	433.12	0.846
3.5	19.9	13	28.85	375.05	0.901
3.6	20.5	13	29.35	381.55	0.917
4.0	23	12	32.29	387.48	1.009

When H-Shield HD Composite CG with a base foam thickness of greater than 3.5" is specified, Hunter Panels recommends the installation of a two layer system with staggered joints..

# H-SHIELD NB

	SIZE	FOAM	LTR	PCS	LBS/PCS	LBS/SF	LBS/PAL
<b>7/16 OSB</b>	1.50	1.0	6.3	32	52.70	1.647	1686.4
	2.00	1.5	9.2	24	55.30	1.728	1327.2
	2.50	2.0	12.0	19	57.90	1.809	1100.1
	3.00	2.5	15.0	16	60.50	1.891	968.0
	3.50	3.0	18.0	13	63.10	1.972	820.3
	4.00	3.5	21.1	12	65.70	2.053	788.4
<b>5/8 OSB</b>	1.60	1.0	6.3	30	66.70	2.084	2001.0
	2.10	1.5	9.2	22	69.30	2.166	1524.6
	2.60	2.0	12.0	18	71.90	2.247	1294.2
	3.10	2.5	15.0	15	74.50	2.328	1117.5
	3.60	3.0	18.0	13	77.10	2.409	1002.3
	4.10	3.5	21.1	11	79.70	2.491	867.7
<b>5/8 PLY</b>	1.60	1.0	6.3	30	59.20	1.850	1776.0
	2.10	1.5	9.2	22	61.80	1.931	1359.6
	2.60	2.0	12.0	18	64.40	2.013	1159.2
	3.10	2.5	15.0	15	67.00	2.094	1005.0
	3.60	3.0	18.0	13	69.60	2.175	904.8
	4.10	3.5	21.1	11	72.20	2.256	794.2
<b>3/4 PLY</b>	1.70	1.0	6.3	28	69.20	2.163	1937.6
	2.20	1.5	9.2	21	71.80	2.244	1507.8
	2.70	2.0	12.0	17	74.40	2.325	1264.8
	3.20	2.5	15.0	15	77.00	2.406	1155.0
	3.70	3.0	18.0	12	79.60	2.488	955.2
	4.20	3.5	21.1	11	82.20	2.569	904.2

H-Shield NB: Is only manufactured in the sizes listed in the chart above. R-values other than those listed above can be achieved by installing a multi layer system consisting of an additional layer of flat polyiso under H-Shield Nb.




# HUNTER PANELS COOL-VENT®

	SIZE	FOAM	LTR	PCS	LBS/PCS	LBS/SF	LBS/PAL
<b>7/16 OSB</b>	2.50	1.0	5.7	19	60.30	1.884	1145.7
	3.00	1.5	8.6	16	62.90	1.966	1006.4
	3.50	2.0	11.4	13	65.50	2.047	851.5
	4.00	2.5	14.4	12	68.10	2.128	817.2
	4.10	2.6	15.0	11	68.62	2.144	754.8
	4.50	3.0	17.4	10	70.70	2.209	707.0
	5.00	3.5	20.5	9	73.30	2.291	659.7
<b>5/8 OSB</b>	2.60	1.0	5.7	18	74.30	2.322	1337.4
	3.10	1.5	8.6	15	76.90	2.403	1153.5
	3.60	2.0	11.4	13	79.50	2.484	1033.5
	4.10	2.5	14.4	11	82.10	2.566	903.1
	4.20	2.6	15.0	11	82.62	2.581	908.8
	4.60	3.0	17.4	10	84.70	2.647	847.0
	5.10	3.5	20.5	9	87.30	2.728	785.7
<b>5/8 PLY</b>	2.60	1.0	5.7	18	66.80	2.088	1202.4
	3.10	1.5	8.6	15	69.40	2.169	1041.0
	3.60	2.0	11.4	13	72.00	2.250	936.0
	4.10	2.5	14.4	11	74.60	2.331	820.6
	4.20	2.6	15.0	11	75.12	2.347	826.3
	4.60	3.0	17.4	10	77.20	2.413	772.0
	5.10	3.5	20.5	9	79.80	2.494	718.2
<b>3/4 PLY</b>	2.70	1.0	5.7	17	76.80	2.400	1305.6
	3.20	1.5	8.6	14	79.40	2.481	1111.6
	3.70	2.0	11.4	15	82.00	2.563	1230.0
	4.20	2.5	14.4	11	84.60	2.644	930.6
	4.70	3.0	17.4	10	87.20	2.725	872.0
	5.20	3.5	20.5	9	89.80	2.806	808.2

Cool-Vent is only manufactured in the sizes listed in this chart.

R-values other than those listed above may be achieved by installing a multi-layer system consisting of an additional layer of flat polyiso under Cool-Vent.




# TAPERED H-SHIELD

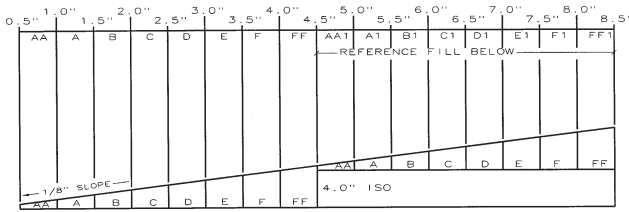

BOARD STYLE	LTTR	DIMENSIONS IN INCHES	BD FT PER PANEL	PCS PER BUNDLE	SQ FT PER BUNDLE	WEIGHT PER SF 20 PSI	WEIGHT PER SF 25 PSI	
1/8	AA	4.3	0.5" - 1.0"	12	64	1024	0.203	0.209
	A	7.1	1.0" - 1.5"	20	38	608	0.282	0.292
	B	10	1.5" - 2.0"	28	26	416	0.361	0.376
	C	12.9	2.0" - 2.5"	36	20	320	0.44	0.459
	D	15.9	2.5" - 3.0"	44	16	256	0.519	0.542
	E	18.9	3.0" - 3.5"	52	14	224	0.599	0.626
	F	22	3.5" - 4.0"	60	12	192	0.678	0.709
FF	25.2	4.0" - 4.5"	68	10	160	0.757	0.792	
1/4	X	5.7	0.5" - 1.5"	16	48	768	0.242	0.251
	Y	11.4	1.5" - 2.5"	32	24	384	0.401	0.417
	Z	17.4	2.5" - 3.5"	48	16	256	0.559	0.584
	ZZ	23.6	3.5" - 4.5"	64	12	192	0.717	0.751
	G	8.6	1.0" - 2.0"	24	32	512	0.322	0.334
1/2	H	14.4	2.0" - 3.0"	40	18	288	0.48	0.501
	I	20.5	3.0" - 4.0"	56	12	192	0.638	0.667
	Q	8.6	0.5" - 2.5"	24	32	512	0.322	0.334
3/8	QQ	20.5	2.5" - 4.5"	56	12	192	0.638	0.667
	XX	11.4	1.0" - 3.0"	32	24	384	0.401	0.417
3/8	SS	7	0.5" - 2.0"	20	38	608	0.282	0.292
	TT	15.9	2.0" - 3.5"	44	16	256	0.519	0.542
	S	10	1.0" - 2.5"	28	26	416	0.361	0.376
	T	18.9	2.5" - 4.0"	52	14	224	0.599	0.626

\* Not all sizes are available to ship from Canada.

# TAPERED H-SHIELD CG

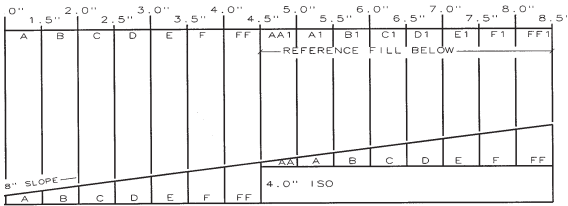

	BOARD STYLE	LTTR	DIMENSIONS IN INCHES	BD FT PER PANEL	PCS PER BUNDLE	SQ FT PER BUNDLE	WEIGHT PER SF 20 PSI	WEIGHT PER SF 25 PSI
1/8	AA	4.3	0.5" - 1.0"	12	64	1024	0.319	0.325
	A	7.1	1.0" - 1.5"	20	38	608	0.398	0.408
	B	10	1.5" - 2.0"	28	26	416	0.477	0.492
	C	12.9	2.0" - 2.5"	36	20	320	0.556	0.575
	D	15.9	2.5" - 3.0"	44	16	256	0.635	0.658
	E	18.9	3.0" - 3.5"	52	14	224	0.715	0.742
	F	22	3.5" - 4.0"	60	12	192	0.794	0.825
FF	25.2	4.0" - 4.5"	68	10	160	0.873	0.908	

1/4	X	5.7	0.5" - 1.5"	16	48	768	0.358	0.367
	Y	11.4	1.5" - 2.5"	32	24	384	0.517	0.533
	Z	17.4	2.5" - 3.5"	48	16	256	0.675	0.7
	ZZ	23.6	3.5" - 4.5"	64	12	192	0.833	0.867
	G	8.6	1.0" - 2.0"	24	32	512	0.438	0.45
1/2	H	14.4	2.0" - 3.0"	40	18	288	0.596	0.617
	I	20.5	3.0" - 4.0"	56	12	192	0.754	0.783

3/8	Q	8.6	0.5" - 2.5"	24	32	512	0.438	0.45
	QQ	20.5	2.5" - 4.5"	56	12	192	0.754	0.783
	XX	11.4	1.0" - 3.0"	32	24	384	0.517	0.533

3/16	JJ	5	0.5" - 1.25"	14	54	864	0.339	0.346
	KK	9.3	1.25" - 2.0"	26	28	448	0.457	0.471
	LL	13.6	2.0" - 2.75"	38	20	320	0.576	0.596
	MM	18.2	2.75" - 3.5"	50	14	224	0.695	0.721
	J	7.8	1.0" - 1.75"	22	34	544	0.418	0.429
	K	12.1	1.75" - 2.5"	34	22	352	0.536	0.554
	L	16.6	2.5" - 3.25"	46	16	256	0.655	0.679
M	21.3	3.25" - 4.0"	58	12	192	0.774	0.804	

3/8	SS	7	0.5" - 2.0"	20	38	608	0.398	0.408
	TT	15.9	2.0" - 3.5"	44	16	256	0.635	0.658
	S	10	1.0" - 2.5"	28	26	416	0.477	0.492
	T	18.9	2.5" - 4.0"	52	14	224	0.715	0.742

1/16	1	3.6	0.5" - 0.75"	10	76	1216	0.299	0.304
	2	5.0	0.75" - 1.0"	14	54	864	0.339	0.346
	3	6.4	1.0" - 1.25"	18	42	672	0.378	0.388
	4	7.8	1.25" - 1.5"	22	34	544	0.418	0.429
	5	9.3	1.5" - 1.75"	26	28	448	0.457	0.471
	6	10.7	1.75" - 2.0"	30	24	384	0.497	0.513
	7	12.1	2.0" - 2.25"	34	22	352	0.536	0.554
	8	13.6	2.25" - 2.5"	38	20	320	0.576	0.596

\* Not all sizes are available to ship from Canada.



## 4'X4' DRAIN SUMP

SLOPE	PANEL	MINIMUM THICKNESS	MAXIMUM THICKNESS	PCS/PAL	LBS/PCS	LBS/SF	LBS/PAL
1/2"	Q1	0.50	1.50	30	5.630	0.352	168.9
	Q2	1.50	2.50	18	9.194	0.575	165.5
	XX1	1.00	2.00	22	9.386	0.578	206.5
	XX2	2.00	3.00	15	13.627	0.852	204.4



## 8'X8' HINGED DRAIN SUMP

SLOPE	PANEL	MINIMUM THICKNESS	MAXIMUM THICKNESS	PCS/PAL	LBS/PCS	LBS/SF	LBS/PAL
1/4"	X	0.50	1.50	14	24.329	0.380	340.6
	G	1.00	2.00	10	25.600	0.400	256.0
	Y	1.50	2.50	8	29.375	0.459	235.0
1/2"	Q	0.50	2.50	8	30.575	0.478	244.6
	XX	1.00	3.00	6	35.750	0.559	214.5
3/8"	SS	0.50	2.00	10	26.540	0.415	265.4