


Fastening Information for CMU, Concrete or Steel Stud Walls

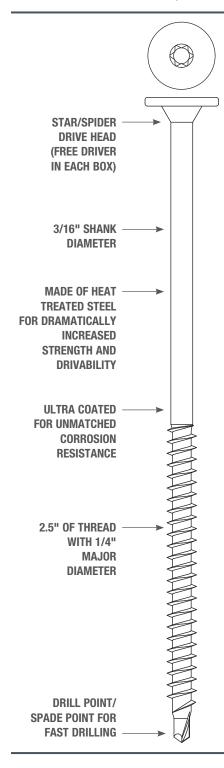

Hunter Panels SIP SD Fastener is intended to mechanically attach Hunter Xci NB, Hunter Xci Ply or Xci Ply (Class A) to CMU, Concrete or Steel Stud wall types. Hunter Panels SIP SD Fastener has the following features:

- FM approved plates not required
- pull out values for metal
- star/spider head elminates need for washer and offers dramatically increased pull-out value
- multiple bits included in each pail
- 100% American made
- fast, one-step steel stud installation
- no pre-drilling required in steel stud applications
- for use with 18 ga and lighter steel studs
- for use on concrete or cmu, 3/16" pilot hole 1½" deep is required

Test Description	Typical Value
Pull-through (lbs)	630*
Pull-out (lbs):	
22 gauge metal	510
20 gauge metal	645
18 gauge metal	920

Fasteners should never be struck with a hammer during installation. *Through $^{7}\!\!/_{16}$ " OSB

Physical Data Chart		
Head Diameter	.625"	
Thread Diameter	.240"	
Shank Diameter	.190"	
Fastener Length*	3½", 4", 4½", 5", 5½", 6", 6½"	

*Consult NTA Report for recommended fastener spacing.

Minimum 1" penetration into steel stud.

For more information on these products, visit www.hunterpanels.com.

