




# Fastening Information for Wood Stud Walls

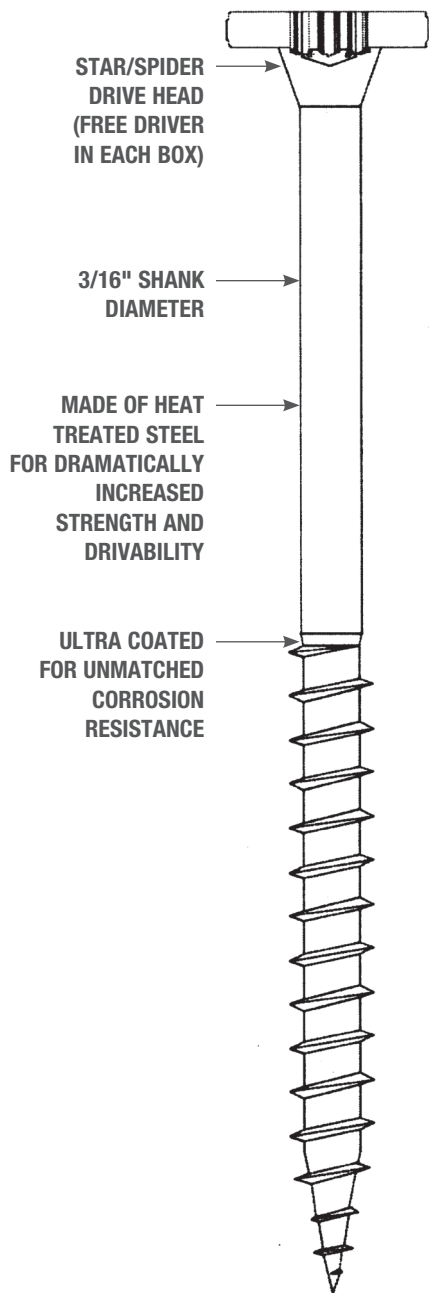

Hunter Panels SIP WD Fastener is intended to mechanically attach Hunter Xci NB, Hunter Xci Ply or Xci Ply (Class A) to wood studs or wood framing. Hunter Panels SIP WD Fastener has the following features:

- FM approved — plates not required
- star/spider head eliminates need for washer and offers dramatically increased pull-out value
- 100% American made
- fast, one-step installation
- no pre-drilling
- multiple bits included in each pail

Test Description	Typical Value
<b>Pull-through (lbs)</b>	630
<b>Pull-out (lbs):</b>	
1/2" plywood	442
5/8" plywood	459
3/4" plywood	710
Douglas Fir (1" pen.)	768

Fasteners should never be struck with a hammer during installation.

Physical Data Chart	
<b>Head Diameter</b>	.625"
<b>Thread Diameter</b>	.240"
<b>Shank Diameter</b>	.190"
<b>Fastener Length*</b>	3", 3½", 4", 4½", 5", 5½", 6", 6½"

**Minimum 1.5" penetration into wood stud.**

\* Consult NTA Report for recommended fastener spacing.

For more information on these products, visit [www.hunterpanels.com](http://www.hunterpanels.com).

Hunter Panels | 15 Franklin St, Portland, Maine 04101 | 888.746.1114 | [www.hunterpanels.com](http://www.hunterpanels.com)

NEW YORK ILLINOIS FLORIDA TEXAS UTAH PENNSYLVANIA WASHINGTON



HUNTER  
CONTINUOUS INSULATION