



HUNTER  
CONTINUOUS INSULATION

# Hunter Panels Xci NB

Vertical Nailable Polyiso Insulation

## DESCRIPTION

Xci NB is a high thermal rigid insulation panel composed of a closed cell polyisocyanurate foam core bonded to a premium performance coated glass facer on one side and 7/16" or 5/8" OSB or plywood on the other. It is designed for use in Type V commercial and residential wall applications to provide continuous insulation within the building envelope.

## FEATURES AND BENEFITS

- Polyiso offers increased R-value per inch vs mineral fiber, XPS or EPS options
- Designed for use in continuous insulation to assist in meeting the most current ASHRAE 90.1, IECC, IBC and IRC standards
- A superior combination of high insulating properties and nailable surface
- Manufactured with NexGen Chemistry: Contains no CFCs, HCFCs, is Zero ODP, and has virtually no GWP
- Incorporates APA-TECO Rated Exposure OSB or Plywood
- Provides improved dimensional stability and fire performance

## APPLICATIONS

- Provides continuous insulation (ci) for standard wood frame, FRT wood frame, steel stud, CMU and concrete exterior wall constructions
- Suitable substrate for Fiber Cement Siding, Masonry, Metal, Composite Cladding Systems, Wood Clapboards, Wood Shingles and Vinyl Siding
- Suitable for new construction and retrofit on commercial and residential exterior walls

## PANEL CHARACTERISTICS

- ASTM C 1289 Type V made with Type II Class 2 foam
- Available in 4'x8' (1220mm x 2440mm) panels in thicknesses of 1.5" (38mm)–4.7" (119mm)
- Available with 7/16" or 5/8" OSB
- Available with 5/8" or 3/4" Plywood


## CODES AND COMPLIANCES

- ASTM C 1289
- California Code of Regulations, Title 24, Insulation Quality Standard License #TI-1420
- California Bureau of Furnishings and Home Insulation
- **UL Classified for use in Canada**
  - Refer to UL Director of Products Certified for Canada for more details

## STRUCTURAL

Hunter Xci NB, up to 2.6" of total thickness, can be used as structural insulating sheathing when applied to wood studs. Please contact Hunter Panels for shear values, wind loads and attachment requirements.

## HUNTER PANELS Xci NB

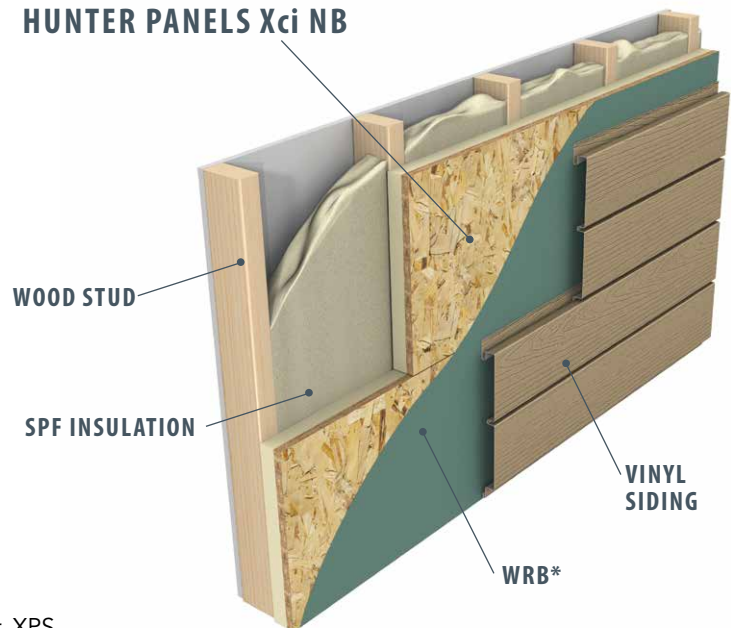

\* Please see WRB section for more information.

## Typical Physical Property Data Chart

polyiso foam core only

Property	Test Method	Value
Compressive Strength	ASTM D 1621	20 psi* min. (138 kPa, Grade 2)
Dimensional Stability	ASTM D 2126	2% linear change (7 days)
Moisture Vapor Permeance	ASTM E 96	<1 perm (57.5ng/(Pa·s·m <sup>2</sup> ))
Water Absorption	ASTM C 209	< 0.1% volume
Service Temperature		-100° to 250° F (-73°C to 122°C)
Resistance to Mold	ASTM D 3273	Passes (10)

\*Also available in grade 3 (25 psi)

# Hunter Panels Xci NB

## Vertical Nailable Polyiso Insulation

### FASTENING

Several factors are involved in the proper fastening of Xci NB. These include overall thickness of the panel, the weight of the specified cladding and the type of support provided at the base of the wall assembly. Please contact Hunter Panels for assistance with fastening rate and fastener type.

### WEATHER RESISTANT BARRIER (WRB)

The incorporation of a WRB is a critical element of a wall assembly. Hunter requires a vapor permeable WRB be applied to the wood exterior of Xci Ply. A design professional familiar with local code requirements should specify the selection and placement of any additional WRBs.

### WARNINGS AND LIMITATIONS

Insulation must be protected from open flame. Hunter Panels will not be responsible for specific building design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Hunter Panels for more specific details.

*Note: Xci NB is not intended for use below grade.*

### POST-INSTALLATION EXPOSURE

Xci Ply is not intended to be left exposed for extended periods of time. During the time between the installation of the Xci Ply and the application of the exterior cladding it is recommended that the WRB be installed as soon as possible. If the WRB is not being installed right away it is recommended that the Xci Ply be protected from excess moisture and UV. All unfaced foam exposed directly to daylight can be taped with a compatible waterproof tape and the edges of the boards can be buttered with a sealant that is compatible with the WRB.


### JOB-SITE STORAGE

Good construction practice dictates that all insulations should be protected from moisture and direct sunlight during job-site storage. Pallets of Hunter Panels Xci NB are double packaged in a UV resistant polyethylene bag. This moisture resistant package is designed for protection from the elements during flat bed shipment from our factories to the job-site. Outdoor storage for extended periods of time requires waterproof tarpaulins and elevated storage above ground level a minimum of 2". Additionally, we recommend slitting the bundle packaging vertically down the center of the two short sides to prevent moisture accumulation within the package.

Xci NB Thermal Values		
Thickness* (inches)	Thickness* (mm)	R-Value
1.5	38	6.6
2.0	51	9.6
2.5	64	12.7
3.0	76	15.9
3.5	89	19.1
4.0	102	22.3
4.5	114	25.6

*Thermal values as per ASTM C 518 in accordance with ASTM C 1289.*

*\*thicknesses calculated with 7/16" OSB*

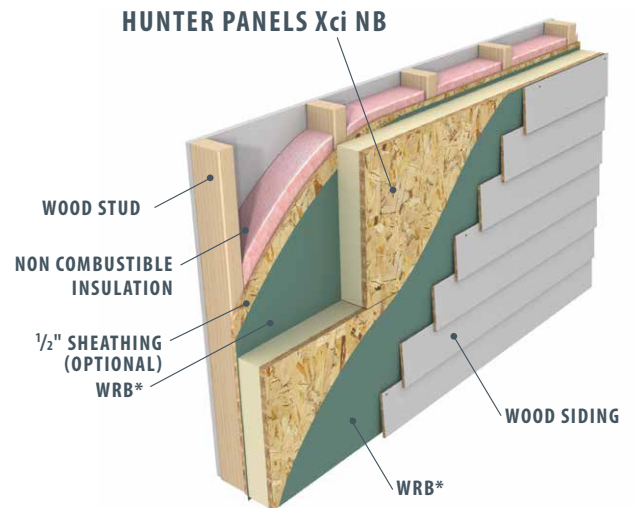


\* Please see WRB section for more information.



HUNTER  
CONTINUOUS INSULATION

888.746.1114

www.hunterpanels.com



### LEED POTENTIAL CREDITS FOR POLYISO USE

#### Energy and Atmosphere

- Optimize Energy Performance

#### Materials & Resources

- Building Life-Cycle Impact Reduction
- Environment Product Declaration
- Material Reuse • Recycled Content
- Construction and Demolition Waste Management

#### Indoor Environmental Quality

- Thermal Comfort

04-19

HUNTER PANELS • Energy Smart Polyiso

NEW YORK

ILLINOIS

FLORIDA

TEXAS

UTAH

PENNSYLVANIA

WASHINGTON